


黄铜阀门

黄铜闸阀

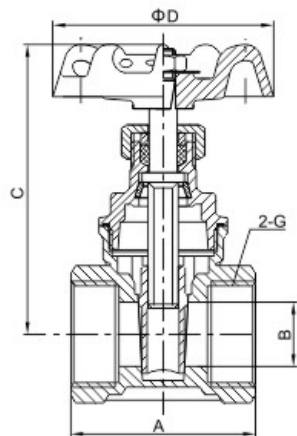


型号：Z15W-16T

DN	Size	A	B	C	D	G
15	1/2	43	12.7	71	54	1/2
20	3/4	46	16	76.5	54	3/4
25	1	49	20	86	60	1
32	1 1/4	52	26	99	68	1 1/4
40	1 1/2	56.5	32	109.5	72	1 1/2
50	2	64	43	130.5	80	2
65	2 1/4	80	52	156.5	100	2 1/4
80	3	83	63.5	183.5	110	3
100	4	101.5	84	223	126	4

技术规范

公称压力：1.6 MPa
 工作温度：-20°C ≤ t ≤ 150°C
 工作介质：水、非腐蚀性液体
 饱和蒸汽(≤0.6MPa)
 圆柱管螺纹符合ISO228标准

黄铜锁式闸阀

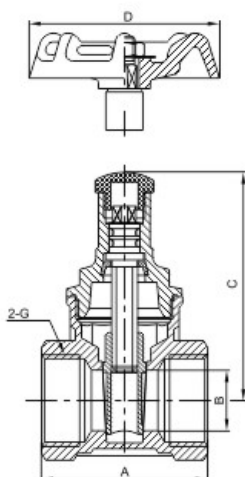


型号：Z15W-16T

DN	Size	A	B	C	D	G
15	1/2	43	12.7	63.1	54	1/2
20	3/4	46	16	67	54	3/4
25	1	49	20	72.7	60	1
32	1 1/4	52	26	82.3	72	1 1/4
40	1 1/2	56.5	32	96.6	80	1 1/2
50	2	64	43	110.3	80	2

技术规范

公称压力：1.6 MPa
 工作温度：-10°C ≤ t ≤ 110°C
 工作介质：水、非腐蚀性液体
 圆柱管螺纹符合ISO228标准

黄铜磁性锁式闸阀

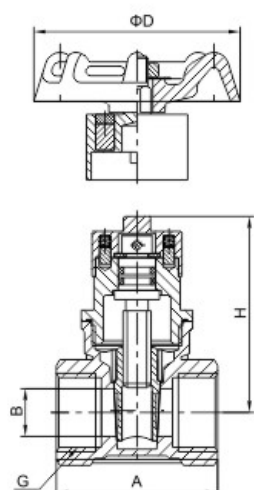

型号：Z15W-16T

DN	A	B	D	H	G
手轮					
15	43	12.7	54	75	1/2
20	46	16	54	82.5	3/4
25	49	20	54	88	1
长手柄锁					
32	52	26	-	76.3	1 1/4
40	56.5	32	-	89.3	1 1/2
50	64	43	-	104.3	2

技术规范

公称压力：1.6 MPa
 工作温度：-20°C ≤ t ≤ 120°C
 工作介质：水、非腐蚀性液体
 饱和蒸汽(≤0.6MPa)
 圆柱管螺纹符合ISO228标准